


Treatment

Single Section

The Athlegen Treatment Single Section is suitable for a wide range of modalities, including massage, acupuncture and osteopathy.

Optional face cradle extensions with armrests can also be fitted. The sturdy design helps to optimize your performance whilst achieving maximum comfort and support for your clients. Combine this with quiet height adjustment and you have discovered just a few reasons why this is the perfect table for your practice.

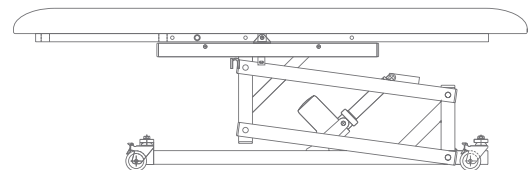

features

- Electric power height adjustment system is driven by a commercial grade linear actuator made in Germany ensuring fast, reliable and vibration free performance.
- Optional face recess and face cradle bracket allow this table to be customised to give greater client comfort during extended prone treatments.
- 8 pivot lifting arm mechanism, super strong with self lubricating nylon bushes to ensure smooth and quiet operation.
- Upholstery construction features high quality Australian made cfc free foam rubbers.
- High quality protective coated vinyl with oil resistant properties; durable, with a soft and comfortable feel.
- Choice of table top widths and cushioning constructions so you can customise the treatment area to best suit your requirements.
- Heavy duty, industrial quality lockable castors with a chrome housing, steel bearings and a rubber wheel tread.
- Durable powder coated rust resistant frame.
- Heavy duty stainless steel footswitch
- Built to last with very low maintenance.

specifications

Maneuverability 360° rotation, heavy duty industrial quality lockable casters.	Power requirements 240 VAC @ 3.4 AMPS
Covering PVC tested to AS 1441.11, AS 1530.3, AS 4088.1	Table Length 1840mm
Cushioning CFC free, polyurethane foam	Shipping dimensions 1900mm x 800mm x 800mm
Frame Powder coated, rust resistant steel frame	Shipping weight 125kg
Maximum working height 970mm (with Standard cushioning)	Warranty Australia 5 years structural and 3 years motor. Extended warranty available. Other countries upon request.
Minimum working height 480mm (with Standard cushioning)	
Maximum working load 175kg	